






Reference Guide



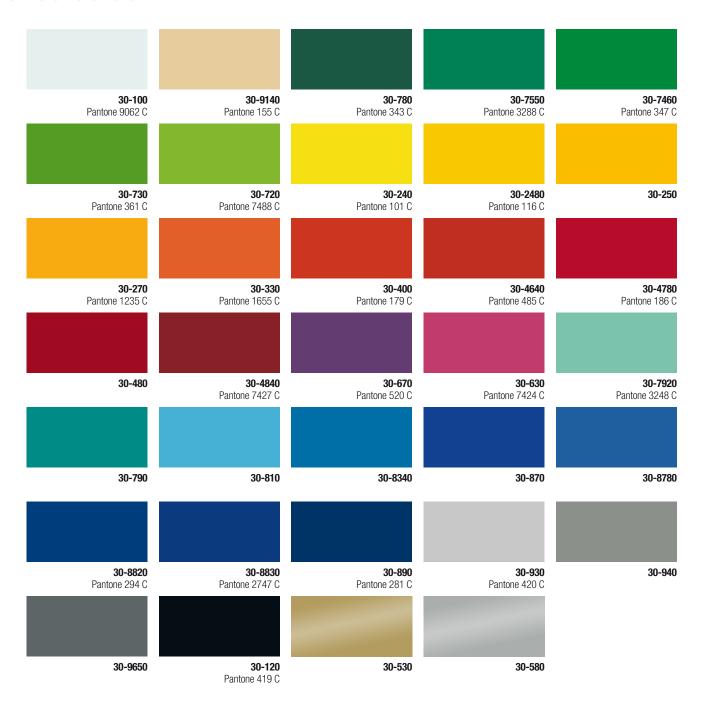



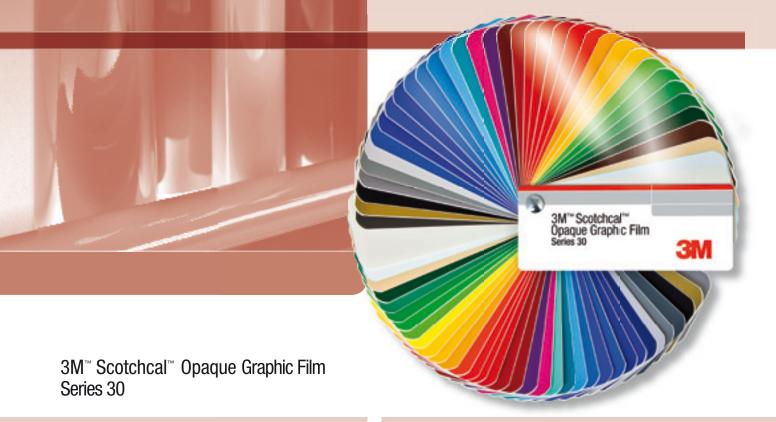

Product Features

- Suitable for interior and exterior applications
- Typical applications

Non-illuminated, electronically cut graphics, logos, emblems, lettering and labels for promotional applications. Promotional vehicle and window graphics or signs, both indoor and outdoor.

• Suitable application surfaces and substrates

Flat surfaces without rivets. Glass, metals, acrylics, polycarbonates, fiberglass, painted surfaces.

· Graphic durability

Up to 5 years*

• Colour range

39 glossy and 35 matte colours.

 Application temperature range, wet-bonded from +10°C

*See relevant technical bulletin for full details. Further information and samples on request.

Product Data

• Suitable graphic production processes

Hand, die and electronic cutting and screen printing.

All Colours with Pantone references are a simulation of a PANTONE°-identified Colour standard.

Evaluation illuminant: D6500K a viewed in the Pantone® Viewing light. Consult current PANTONE Colour Publications for accurate Colour. PANTONE® is the property of Pantone, Inc., ©Pantone, Inc., 2010

3M Distributor

